



01-22-02

GP 2642
2644 #2
02.25.02

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventor(s):

Göran PEHRSSON

U.S. Serial No.:

09/988,457

U.S. Filing Date:

November 20, 2001

Art Unit:

2642

RECEIVED

JAN 31 2002

Technology Center 2600

Priority Claim:

SE 0004266-3

Priority Date:

November 21, 2000

Title of Invention:

A PORTABLE COMMUNICATION DEVICE

Attorney Docket No.:

45051-00021

Assistant Commissioner for Patents
Washington, D.C. 20231

RECEIVED
JAN 30 2002
TC 2800 MAIL ROOM
Madam Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Receipt No. EL749039213US

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage for Express Mail in an envelope addressed to:

Assistant Commissioner for Patents
Washington, D.C. 20231

on January 18, 2002

Type or Print Name

Cheryl Gibson

Signature


Cheryl Gibson

CLAIM OF PRIORITY UNDER 35 U.S.C. § 119

Under the provisions of 35 U.S.C. §119 Applicant hereby claims the priority of Swedish patent application No. 0004266-3 as filed on November 21, 2000 which is identified in the declaration of the above-identified application. A certified copy of the priority document is filed herewith.

Applicant believes that no further information or documentation in support of the priority claim will be required.

Respectfully submitted,

A handwritten signature in black ink that reads "Robert W. Mason". The signature is written in a cursive style with a large, stylized "R" and "M".

Robert W. Mason
Reg. No. 42,848

JENKENS & GILCHRIST, P.C.
1445 Ross Avenue, Suite 3200
Dallas, Texas 75202-2799
Telephone: 214-855-4500
Facsimile: 214-855-4300

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen



Intyg Certificate

RECEIVED

JAN 30 2002

TC 2800 MAIL ROOM



Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Telefonaktiebolaget L M Ericsson (publ), Stockholm
Applicant (s) SE

(21) Patentansökningsnummer 0004266-3
Patent application number

(86) Ingivningsdatum 2000-11-21
Date of filing

RECEIVED

JAN 31 2002

Technology Center 2600

Stockholm, 2002-01-02

För Patent- och registreringsverket
For the Patent- and Registration Office

Hjördis Segerlund
Hjördis Segerlund

Avgift
Fee 170:-

**PATENT- OCH
REGISTRERINGSVERKET
SWEDEN**

Postadress/Adress
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 86
08-666 02 86

APPLICANT:**TELEFONAKTIEBOLAGET LM ERICSSON****TITLE:****A PORTABLE COMMUNICATION DEVICE****5 Field of the Invention**

The present invention relates to a portable communication device and a method for conference calls, and more particularly to a portable communication device with conference call capability, wherein at least two parties
10 can use the same portable communication device for communicating with at least a third party in a conference call.

Background of the Invention

15 A conventional mobile phone is used for a single user and, consequently, the mobile phone has a single microphone for receiving sound waves of human voice of the user of the phone and a single loudspeaker for reproducing sound for the user.

20 However, in some situations it is desirable to set up a call with more than two participants. Some prior art mobile phones, like the Ericsson mobile phone T28 and others, solve this problem by providing a conference call service that enables calls involving more than two
25 participants. To create a conference call with three participants A, B, and C, A has a conventional prior art mobile phone with conference call capability and B and C may have either conventional prior art mobile phones or just conventional telephone sets. A makes a call to B. When
30 B answers the call, A puts B on hold and makes a second call, this time to C. Then, A joins the calls through a particular function provided in the network. Now, all participants can hear each other at the same time.

A conference call can be created in other ways than
35 the example described above, but this is well known and therefore not described herein in detail.

When for example A and B are at the same place and want to set up a conference call with C who is remote, it is inconvenient to create a conference call involving three phones as described above. Further, it seems to be
5 unnecessarily expensive to have two ongoing calls at the same time. A more common and less expensive way of setting up a conference call in this case is to use a system phone provided with an additional fixed loudspeaker and fixed microphone. Then, A can make a call to C and instead of
10 using the regular handset both A and B speak with C through the additional microphone and listen to C via the additional loudspeaker. Thus, only one call is charged at the same time.

However, it is not always possible to find a system
15 phone in the vicinity. For example in an airport transit hall or another public place you are reduced to the case with two mobile phones, one for A and one for B for creating a conference call with the third participant C.

20 Summary of the Invention

The object of the present invention is to provide a portable communication device such as a mobile phone with an improved conference call capability, wherein at least two parties can use the same portable communication device
25 for communicating with at least a third party in a conference call.

This is accomplished by a portable communication device according to the present invention, comprising at least first and second speech encoder paths with first and
30 second inputs for connection to first and second microphones, respectively, and at least one output connected to a signal processor which receives and processes first and second electronic signals from the microphones via the first and second speech encoder paths
35 for transmission to a radio frequency transmitter/receiver

operatively connected to the signal processor, wherein the apparatus is adapted to receive the first and second electronic signals simultaneously even if the signals are different, and the apparatus comprises a summator for
5 summing the first and second electronic signals into a sum signal before transmission to the radio frequency transmitter/receiver for further transmission.

A more specific object of the invention is to provide an improved CODEC block for use in a portable communication
10 device for conference calls.

This object is achieved by a CODEC block, comprising first and second speech encoder paths, with first and second inputs for connection to first and second micro-
phones, respectively, wherein the block is adapted to
15 receive first and second electronic signals simultaneously from the microphones even if the signals are different, and the block comprises a summator for summing the first and second electronic signals into a sum signal before transmission to a radio frequency transmitter/receiver of
20 the phone.

An advantage of the present invention is that a conference call can be created between three participants with only one ongoing call, wherein two of the participants use a common portable communication device.

25 It should be emphasised that the term "comprises/ comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components
30 or groups thereof.

Brief Description of the Drawings

An illustrative embodiment of the invention will now be described in conjunction with the accompanying drawings,
35 in which

FIG 1 is a block diagram of a portable communication device with conference call capability according to a first embodiment of the invention; and

FIG 2 is a block diagram of a portable communication device with conference call capability according to a second embodiment of the invention.

Detailed description of the Invention

FIG 1 of the drawings shows a block diagram of a first embodiment of a portable communication device with conference call capability according to a first embodiment of the invention.

The term portable communication device, which herein after is referred to as a mobile telephone apparatus, includes all equipment such as mobile telephones, pagers, communicators, i.e. electronic organizers, smartphones, cordless phones, satellite phones or the like.

The mobile telephone apparatus comprises a CODEC (coder and decoder) block 1 provided with first microphone/line inputs 2a, 2b adapted for a conventional fixed microphone 4 and a second microphone/line input 3 adapted for example a handsfree microphone 5 in a portable handsfree device. The line inputs 2a, 2b and/or 3 can be adapted for another kind of recording device such as a tape recorder or play back device for music etc.

In a conventional mobile phone with a single speech encoder path a user can speak either in the fixed microphone 4 or, when the handsfree unit is connected to the phone, in the handsfree microphone 5. According to the invention the CODEC block 1 has two speech encoder paths, which accept analogue speech from either the fixed microphone 4 or the handsfree microphone 5, separately or simultaneously. A first party A can speak in the fixed microphone 4 and a second party B in the handsfree microphone 5 at the same time, using the same mobile phone

for communicating with at least a third party C in a conference call, which is described in further detail below. The term conference call includes communication between users as well as apparatuses, such as voice mail etc, or a combination thereof.

In the case when the two speech encoder paths operate simultaneously, they generate two different PCM output bit streams via first and second PCM outputs 6 and 7 for connection to a DSP (digital signal processor) 8. However, the PCM signals could be multiplexed on the same physical output in an alternative embodiment of the invention.

The DSP 8 processes the PCM output bit streams or digital signals from the speech encoder paths, wherein the DSP generates a sum signal of the two bit streams. A central processing unit (CPU) 9 is provided in the phone for interpretation and execution of program instructions for communication with the DSP 8 and for controlling the operations of other components and blocks in the phone. The CPU 9 receives a digital sum signal processed by the DSP based on the PCM output bit streams for transmission to a radio frequency transmitter/receiver 10. The radio frequency transmitter 10 generates an RF signal for transmission through an antenna 11 to a remote mobile phone, or to a conventional telephone, not shown in the drawings, via for example a base station in a conventional cellular network.

Further, the CODEC block 1 has a speech decoder path, which operates simultaneously and independently from the speech encoder paths for duplex operation. The decoder path accepts a PCM signal on its PCM input 12 from the DSP 8 and generates analogue signals for output on first earphone/line outputs 13a,13b or a second earphone/line output 14. The first earphone/line outputs 13a,13b are adapted for a conventional fixed earphone 15 and the second earphone/line output 14 is adapted for a handsfree earphone

2000 -11- 2 1

Huvudfoxen Kassan

16 of the portable handsfree device. Additionally, the line outputs 13a,13b and/or 14 can be adapted for another kind of output device such as a recording device.

5 In a conventional mobile phone a user listens either in the fixed earphone 15 or, when the handsfree unit is connected to the phone, in the handsfree earphone 16.

However, in the case described above, when the handsfree device is connected and the two speech encoder paths operate simultaneously according to the invention, 10 the fixed earphone 15 and the handsfree earphone 16 also operate simultaneously.

The user has to be provided with a sidetone from its microphone to feel comfortable in the meaning of perceiving its own voice during a telephone conversation. Thus, the 15 user of the fixed microphone 4 and earphone 15 receives a sidetone from the fixed microphone 4 and the user of the handsfree device receives a sidetone from the handsfree microphone 5. The sidetones are generated by the DSP 8 based on the two different bit streams from the two speech 20 encoder paths and are provided to the earphones 15 and 16 through the speech decoder path, under supervision of the CPU 9. This means that each user (party A or B) receives also the other user's (party B or A) voice signals. Hence, a true conference call capability with at least three 25 participants is provided by the mobile phone according to the invention.

Again referring to FIG 1 and the CODEC block 1, there are two almost identical speech encoder paths. The first path comprises microphone/line inputs 2a,2b adapted for the 30 fixed microphone 4 connected to a microphone amplifier 17, the output of which is connected to a filter block 18. The filter block 18 comprises a transmit programmable gain stage (TX PGA) for adjustment of the total gain in the product for different sensitivities of the microphones, an 35 analogue-to-digital converter (ADC) and a transmit band

pass filter, which converts the analogue signal from the microphone to a digital signal and filters the resulting signal before input to a PCM (Pulse Code Modulation) encoder 19. The resulting PCM signal is transmitted to the DSP 8 for signal processing including summing as described above. The second path differs from the first path in that its microphone/line input 3 is adapted for the handsfree microphone 5. The microphone signal is further supplied to a filter block 20, directly or via a preamplifier 17' if necessary. The filter block 20 comprises a transmit programmable gain stage (TX PGA), an analogue-to-digital converter (ADC), and a transmit band pass filter, which converts the analogue signal from the handsfree microphone to a digital signal and filters the resulting signal before input to a PCM (Pulse Code Modulation) encoder 21. The resulting PCM signal is transmitted to the DSP 8 for signal processing and summing with the PCM signal from the first speech encoder path.

As described above the CODEC block 1 has a speech decoder path, which operates simultaneously and independently from the speech encoder paths for duplex operation. The PCM signal accepted by the PCM input 12 from the DSP 8 is transmitted to a PCM voice decoder 22. The output signal from the decoder 22 is fed through a programmable volume control 23. Further, the volume-controlled signal is fed through a filter block 24, comprising a receiver low-pass filter, a digital-to-analogue converter for converting the PCM decoded signal into an analogue signal. Before input to a first earphone amplifier 25 for the fixed earphone 15 and/or to a second earphone amplifier 26 for the handsfree earphone 16, the signal passes a receive programmable gain stage (PGA) in the filter block 24, enabling adjustment of the circuit for different sensitivity of the earphone(s) and is spread in the path.

Generally, when the handsfree device 5,16 is connected to the mobile phone, the profile or mode of the phone is set automatically to a portable handsfree profile. This profile implies at least that the fixed earphone and fixed microphone are disconnected. The conference call capability according to the invention is, however, activated by changing to a particular pre-programmed profile in the phone or by changing a corresponding setting in the phone.

10 A second embodiment of a block diagram of a mobile telephone apparatus with conference call capability according to the invention is shown in FIG 2.

The difference between the first and second embodiment is that the summing is performed on the digital PCM signals in the first embodiment and on the analogue signals in the second embodiment.

The first speech encoder path according to the second embodiment of the CODEC block 1' comprises the microphone/line inputs 2a,2b adapted for the fixed microphone 4 connected to a microphone amplifier 17 in a similar way as for the first embodiment. However, the output of the amplifier 17 is connected to an analogue summator 27. The second path also has a microphone/line input 3, which is adapted for the handsfree microphone 5. The microphone signal is further supplied to the summator 27, directly or via a preamplifier 17' if necessary.

The output of the amplifier comprises the analogue sum signal. The signal is filtered through a filter block 28, which comprises a transmit programmable gain stage (TX PGA), an analogue-to-digital converter (ADC), and a transmit band pass filter, which converts the analogue signal from the microphone to a digital signal and filters the resulting signal before input to a PCM (Pulse Code Modulation) encoder 29. The resulting PCM sum signal is transmitted to the DSP 8' for signal processing before

transmission through a remote party through the RF transmitter 10.

As described above, each user has to be provided with a sidetone from its respective microphone to feel comfortable in the meaning of perceiving its own voice during a telephone conversation. Thus, the user of the fixed microphone 4 and earphone 15 receives a sidetone from the fixed microphone 4 and the user of the handsfree device receives a sidetone from the handsfree microphone 5, respectively. In the second embodiment the sidetones are generated by a sidetone block connected between the output of the filter block 28 in the speech encoder path and the input of the filter block 24 in the speech decoder path, which is controlled by the CPU 9. Thus, the sidetones are based on the two different analogue signals from the microphone 4 and the handsfree microphone 5 and are provided to both earphone 15 and the handsfree earphone 16, respectively. This means that each user (party A or B) receives even the other user's (party B or C) voice signals. Hence, a true conference call capability with at least three parties is provided by the mobile phone according to the second embodiment of the invention.

Although the invention has been described by way of a specific embodiment thereof, it should be apparent that the present invention provides a mobile phone with an improved conference call capability that fully satisfy the aims and advantages set forth above, and alternatives and modifications are possible within the scope of the invention.

For example, in an alternative embodiment the fixed microphone and the fixed earphone are replaced by another handsfree device.

In still another embodiment of the invention, the recording device/devices is/are connected to the phone by a short-range radio communication link such as Bluetooth®.

2000 -11- 2 1

Huvudfaxen Kassan

CLAIMS

1. A portable communication device for conference calls, comprising at least first and second speech encoder paths with first and second inputs (2a,2b,3) for connection to first and second recording devices (4,5), respectively, and at least one output (6,7) connected to signal processor means (8;8') for receiving and processing first and second electronic signals from said recording devices (4,5) via said first and second speech encoder paths for transmission to a transmitter/receiver (10) operatively connected to said signal processor means (8;8'), characterised in that said apparatus is adapted to receive said first and second electronic signals simultaneously even if the signals are different, and said apparatus comprises a summator (8;27) adapted to sum said first and second electronic signals into a sum signal for transmission to said transmitter/receiver (10).

2. A portable communication device according to claim 1, characterised in that said summator (8;27) is adapted to sum said first and second electronic signals into a sum signal for transmission to at least two outputs (13a,13b; 14), operatively connected to said signal processor means (8;8'), for connection to recording devices (4,5), such as earphones (15,16).

3. A portable communication device according to claim 1 or 2, characterised in that said signal processor means is a digital signal processor (8).

4. A portable communication device according to claim 3, characterised by at least an analogue-to-digital converter (18,20;28) for converting said first and second electronic signals into digital signals before input to said digital signal processor (8).

040237897

2000-11-20 P:\1076082.doc JA

11

Ink. t. Patent- och ren verkst

2000 -11- 2 1

Huvudfaxen Kassan

5. A portable communication device according to claim 4, characterised in that said summator is a part of said digital signal processor (8).

5

6. A portable communication device according to claim 4, characterised in that said summator is an analogue summator (27), which is a part of said first and second speech encoder paths for summing said first and second electronic signal into an analogue sum signal before A/D conversion into a digital sum signal.

10

7. A portable communication device according to any of the preceding claims, characterised by a sidetone generator (8;30) for generating a first sidetone of said first electronic signal for transmission to said earphones (15,16), and a second sidetone of the second electronic signal for transmission to said earphones (15,16) simultaneously via a speech decoder path of said phone.

20

8. A portable communication device according to claim 7, characterised in that said sidetone generator is a part of said digital signal processor (8).

25

9. A portable communication device according to claim 7, characterised in that said sidetone generator is an analogue sidetone generator (30) connected between said first and second speech encoder paths and said speech decoder path of said phone for transmission of said first and second electronic signals to first and second earphone outputs (13a,13b,14) of said speech decoder path.

30

10. A portable communication device according to any of the preceding claims, characterised in that said first recording device is a conventional fixed microphone (4) or

35

2000-11- 2 1

Huvudfaxen Kassan

12

a microphone in a first portable handsfree device, and said second recording device is a microphone in a second portable handsfree (5) device, and said first earphone (15) is a conventional fixed earpiece or an earphone in said first portable handsfree device, and said second earphone (16) is an earphone in said second portable handsfree device.

11. A portable communication device according to any of the preceding claims, characterised in that at least one of said first and second inputs (2a,2b,3) are adapted for wireless connections to said first and second recording devices (4,5).

12. A portable communication device according to any of the preceding claims 2-11, characterised in that at least one of said at least two outputs (13a,13b;14) is adapted for wireless connections to at least two recording devices (15,16).

13. A portable communication device according to claim 12 or 13, characterised in that said wireless connections are short-range radio communication links.

14. A portable communication device according to any of the preceding claims, characterised in that said portable communication device is a mobile telephone apparatus.

15. A CODEC block for use in a portable communication device for conference calls, comprising first and second speech encoder paths, with first and second inputs (2a,2b,3) for connection to first and second recording devices (4,5), respectively, and a common output (6) for connection to signal processor means (8') of the phone,

characterised in that said block (1') is adapted to receive first and second electronic signals simultaneously from said recording devices (4,5) even if the signals are different, and said block (1') comprises a summator (27) for summing said first and second electronic signals into a sum signal for transmission to a transmitter/receiver (10) of the phone.

16. A CODEC block according to claim 15, characterised in that said summator (27) is adapted to sum said first and second electronic signals into a sum signal for transmission to at least two outputs (13a,13b; 14), operatively connected to said signal processor means (8'), for connection to recording devices (4,5), such as earphones (15,16).

17. A CODEC block according to claim 15 or 16, characterised by at least an analogue-to-digital converter (28) for converting said first and second electronic signals into digital signals before input to said digital signal processor.

18. A CODEC block according to claim 17, characterised in that said summator is an analogue summator (27), which is a part of said first and second speech encoder paths for summing said first and second electronic signal into an analogue sum signal before A/D conversion into a digital sum signal.

19. A CODEC block according to any of the claims 15-18, characterised by a sidetone generator (30) connected between said first and second speech encoder paths and a speech decoder path for transmission of said first and second electronic signals to first and second earphone outputs (13a,13b;14) of said speech decoder path.

+4640237897

2000-11-20 P:\1874081.doc JA

14

Ink. t. Patent- och reg.verket

2000-11-21

Huvudfoxen Kossan

20. A CODEC block according to claim 19,
characterised in that said sidetone generator is an
analogue sidetone generator (27).

5

21. A method of conference calls in a portable
communication device, wherein first and second electronic
signals are received from recording devices (4,5)
operatively connected to said portable communication device
10 characterised by the steps of receiving said first and
second electronic signals simultaneously even if the
signals are different, and generating a sum signal of said
first and second electronic signals for transmission to a
transmitter/receiver (10) of said portable communication
15 device.

22. A method according to claim 21, characterised by
the step of generating a sum signal of said first and
second electronic signals for transmission to at least two
20 outputs (13a,13b; 14) of said portable communication device
for connection to recording devices (4,5), such as
earphones (15,16).

23. A method according to claim 21 or 22,
25 characterised by the step of generating a first sidetone
of said first electronic signal for transmission to said
earphone outputs (13a,13b; 14), and a second sidetone of
the second electronic signal for transmission to said
earphone outputs (13a,13b; 14).

30

35

40237897

2000-11-20 P:\3074081.doc JA

15

Ink. t. Patent- och reg.verket

2000 -11- 2 1

Huvudfaxen Kassan

ABSTRACT

A portable communication device for conference calls, comprising at least first and second speech encoder paths with first and second inputs (2a,2b,3) for connection to first and second recording devices (4,5), respectively, and at least one output (6,7) connected to signal processor means (8;8') for receiving and processing first and second electronic signals from said recording devices (4,5) via said first and second speech encoder paths for transmission to a transmitter/receiver (10) operatively connected to said signal processor means (8,8'), wherein said apparatus is adapted to receive said first and second electronic signals simultaneously even if the signals are different, and said apparatus comprises a summator (8;27) adapted to sum said first and second electronic signals into a sum signal for transmission to said transmitter/receiver (10).

To be published with FIG 2

Ink. t. Patent- och reg.verket

2000 -11- 2 1

Huvudfoxen Kassan

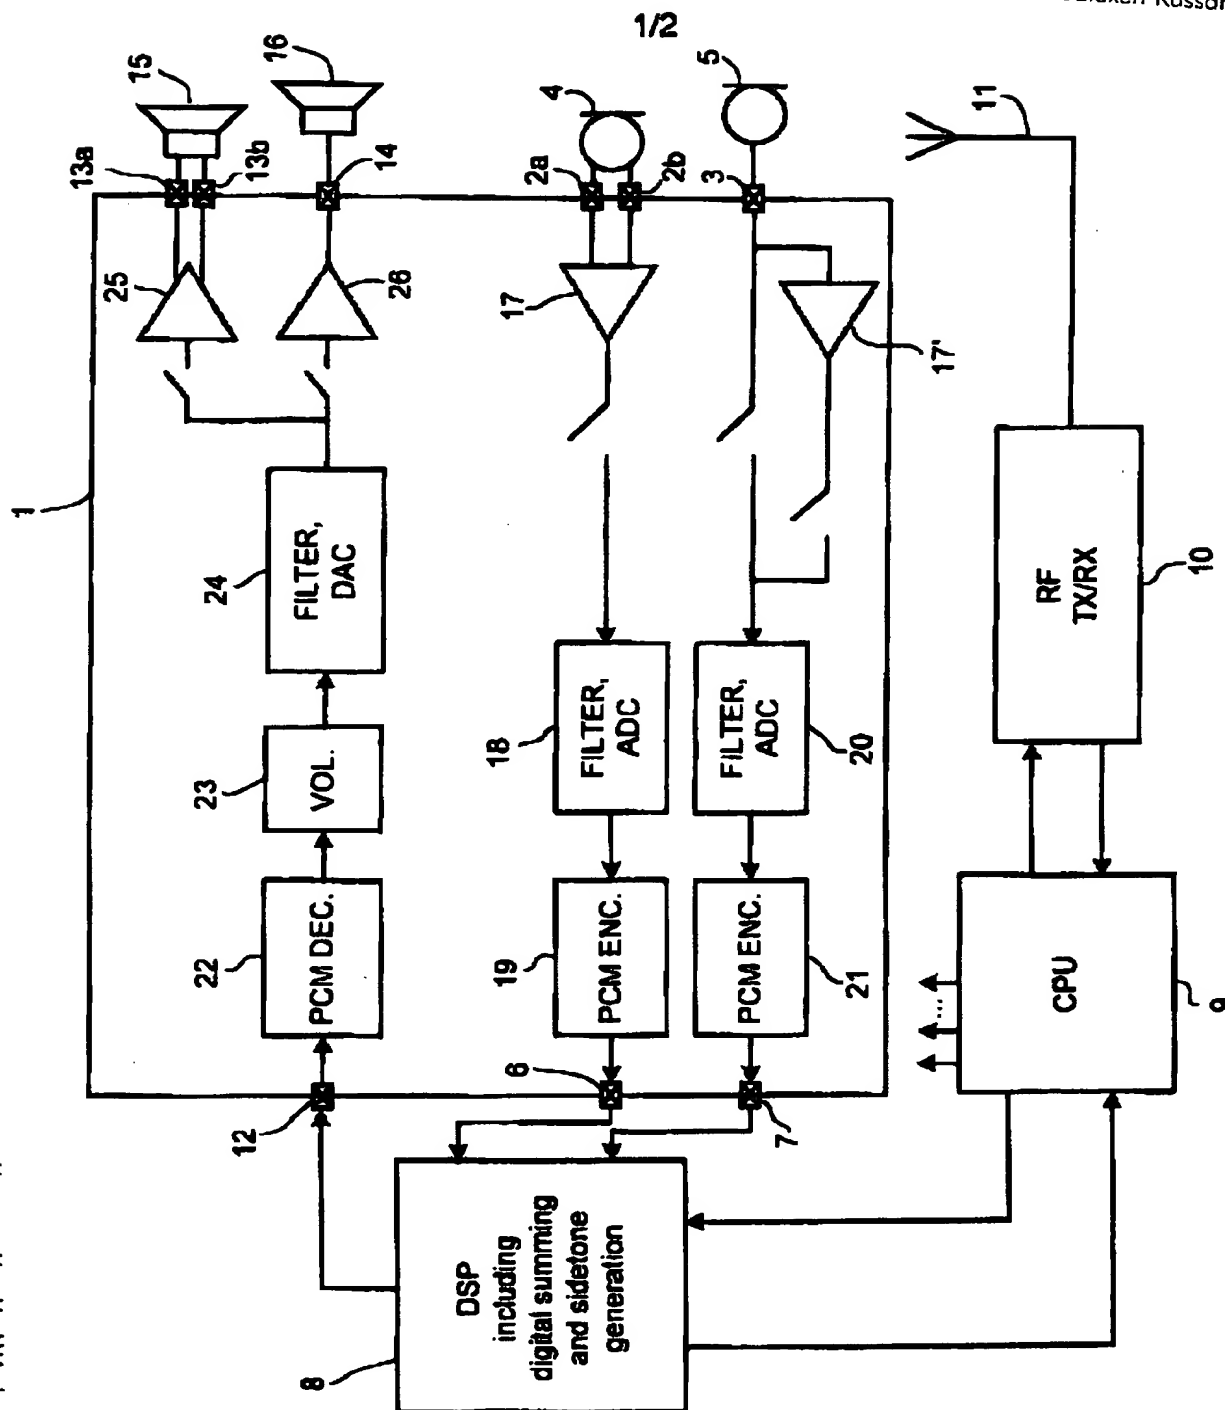


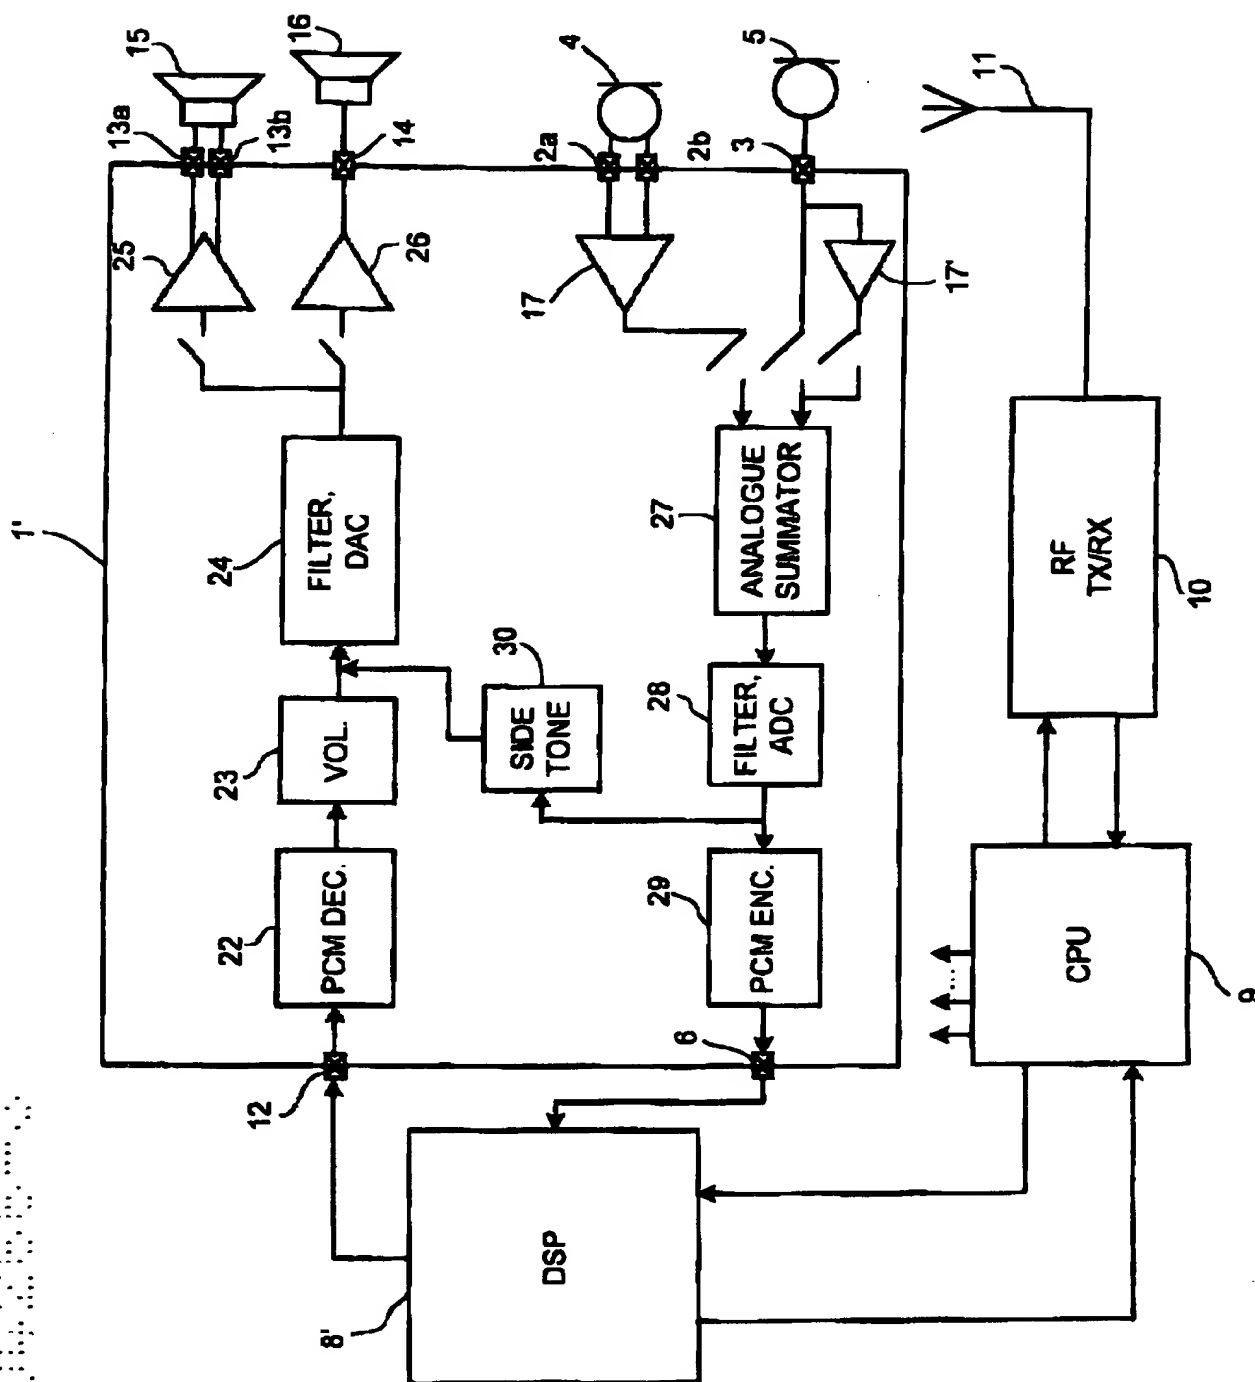
FIG 1

Ink. t. Patent- och regnverket

2000 -11- 21

Huvudfaxen Kassin

2/2

**FIG 2**